

Quality & Reliable

range of electrical wiring accessories of stylish designs for the modern world with you in mind.

www.neiken.com

neikenTM
Quality Electrical Wiring Accessories

:: Contents ::

Company Profile	: 1 :
Plate Switches 10A Single Pole	: 2 :
Intermediate Switch 10A	
Control Switches 20A Double Pole	
Control Switches 45A Double Pole	
Key / Card Switch (For Hotel)	: 3 :
Fused Connection Units 13A	
Dimmer Switches	
Fan Control Switches	
Connection Units	: 4 :
5A Switched Socket Outlets	
13A Switched Socket Outlets	
15A Socket Outlets	
2A Unswitched Socket Outlet	: 5 :
Cooker Control Unit 45A	
Shaver Supply Unit	
Telephone, TV, FM & LAN Data Sockets	
16A 2Pin Universal Socket Outlets	: 6 :
16A Schuko Socket Outlet	
METAL CLAD SERIES	
Metal Clad Switches 10A Single Pole	
Metal Clad Switches 20A Double Pole	: 7 :
Metal Clad 13A Switched Socket Outlets	
Metal Clad 15A Switched Socket Outlets	
2.5A 2Pin Portable Switched Socket Outlets	
13A Portable Switched Socket Outlets	
16A Portable Schuko Socket Outlets	: 8 :
Switch Disconnectors	
ACCESSORIES	: 9 :
Module Units	
Cover Plates	
Pattress Boxes	



TEST CERTIFICATE



This Certificate is issued to:
United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

FOR
Product: Insulated 15A Switched Socket-Outlet
Brand/Model: Neiken/N5311-Q and N5311-1
Detail:

Specification: BS 472: 1999 and Clauses 17 and 22 of BS 241: 1996

Test Report: S55041596/8/MLM/PS

Summary
A sample of the product has been tested and is found to comply with the requirements of the above standard.

Test Product
Inspector & Reporter
Date: 05/09/2006

The Certificate is valid for 12 months from the date of issue. It is valid only for the product and the test conditions specified. The Certificate is not valid for any other product or test conditions. The Certificate is not valid for any other test conditions.

TEST CERTIFICATE



This Certificate is issued to:
United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

FOR
Product: Insulated 15A Switched and Unswitched Socket-Outlet
Brand/Model: Neiken/N5310, N5311-Q and N5311-1
Detail:

Specification: BS 546: 1956 With Amendments 1 to 8 and Supplement 1 & 2

Test Report: S55041596/8/MLM/PS

Summary
A sample of the product has been tested and is found to comply with the requirements of the above standard.

Test Product
Inspector & Reporter
Date: 05/09/2006

The Certificate is valid for 12 months from the date of issue. It is valid only for the product and the test conditions specified. The Certificate is not valid for any other product or test conditions. The Certificate is not valid for any other test conditions.

TEST CERTIFICATE



This Certificate is issued to:
United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

FOR
Product: Metal/Clad 15A Switched Socket-Outlet
Brand/Model: Neiken/N5311-Q and N5311-1
Detail:

Specification: BS 546: 1956 With Amendments 1 to 8 and Supplement 1 & 2

Test Report: S55041557/8/MLM/PS

Summary
A sample of the product has been tested and is found to comply with the requirements of the above standard.

Test Product
Inspector & Reporter
Date: 05/09/2006

The Certificate is valid for 12 months from the date of issue. It is valid only for the product and the test conditions specified. The Certificate is not valid for any other product or test conditions. The Certificate is not valid for any other test conditions.

The 'neiken' ranges of electrical wiring accessories are being developed to suit the décor for the modern homes and offices and a range to suit the industrial purposes. The flush-mounted range is designed with the popular modular concept and mounted on slim polycarbonate face-plates presenting a stylish and elegant new series of wiring accessories.

'neiken' electrical wiring accessories

Parkside Laboratories Ltd

TEST AND CERTIFICATION SERVICES
ELECTRICAL • EMC • ENVIRONMENTAL

Laboratory Test Report

Report No.: 718081
Date Issued: 23 September 2003

Subject: Neiken Switch Disconnect / Isolator Model: N41432 4 Pole, 32 A, 480 V, 50/60 Hz, AC-25A, IPW6

Reference: BS 472: 1999 and Clauses 17 and 22 of BS 241: 1996

Test Report: S55041596/8/MLM/PS

Summary: A sample of the product has been tested and is found to comply with the requirements of the above standard.

Test Product: Insulated 15A Switched and Unswitched Socket-Outlet

Inspector & Reporter: 05/09/2006

The Certificate is valid for 12 months from the date of issue. It is valid only for the product and the test conditions specified. The Certificate is not valid for any other product or test conditions. The Certificate is not valid for any other test conditions.

Parkside Laboratories Ltd

TEST AND CERTIFICATION SERVICES
ELECTRICAL • EMC • ENVIRONMENTAL

Laboratory Test Report

Report No.: 718082
Date Issued: 23 September 2003

Subject: Neiken Switch Disconnect / Isolator Model: N41432 4 Pole, 32 A, 480 V, 50/60 Hz, AC-25A, IPW6

Reference: BS 472: 1999 and Clauses 17 and 22 of BS 241: 1996

Test Report: S55041596/8/MLM/PS

Summary: A sample of the product has been tested and is found to comply with the requirements of the above standard.

Test Product: Insulated 15A Switched and Unswitched Socket-Outlet

Inspector & Reporter: 05/09/2006

The Certificate is valid for 12 months from the date of issue. It is valid only for the product and the test conditions specified. The Certificate is not valid for any other product or test conditions. The Certificate is not valid for any other test conditions.

Due to the products safety and their reliability requirements, 'neiken' products are being type-tested by accredited testing laboratories, an assurance that the products are in compliance to the relevant standards. The products are being manufactured under stringent quality control and in accordance to the ISO 9001:2008 Quality Management System.

Intertek ETL SEMKO

CERTIFICATE OF COMPLIANCE

Applicant: United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

Product: Insulated 15A Switched Socket-Outlet

Model(s): (A) N5311-Q (B) N5311-1 (C) N5311-2 (D) N5311-3 (E) N5311-4 (F) N5311-5 (G) N5311-6 (H) N5311-7 (I) N5311-8 (J) N5311-9 (K) N5311-10 (L) N5311-11 (M) N5311-12 (N) N5311-13 (O) N5311-14 (P) N5311-15 (Q) N5311-16 (R) N5311-17 (S) N5311-18 (T) N5311-19 (U) N5311-20 (V) N5311-21 (W) N5311-22 (X) N5311-23 (Y) N5311-24 (Z) N5311-25

Brand Name: neiken

The submitted sample(s) of the above product has been tested and complied with the following standard(s):

Standard(s): IEC 60868-1: 1996 + Amd 1

Test Report: ET-00403128

Date: 3 July 2004

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Intertek ETL SEMKO

CERTIFICATE OF COMPLIANCE

Applicant: United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

Product: (A) Double Pole Switches 25A (Flush Mounted)

Model(s): (A) N52120 (B) N52121 (C) N52122 (D) N52123 (E) N52124 (F) N52125 (G) N52126 (H) N52127 (I) N52128 (J) N52129 (K) N52130 (L) N52131 (M) N52132 (N) N52133 (O) N52134 (P) N52135 (Q) N52136 (R) N52137 (S) N52138 (T) N52139 (U) N52140 (V) N52141 (W) N52142 (X) N52143 (Y) N52144 (Z) N52145

Brand Name: neiken

The submitted sample(s) of the above product has been tested and complied with the following standard(s):

Standard(s): BS EN 60868-1: 2000 + Amd 1:2006

Test Report: ET-00403128

Date: 19 June 2004

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Intertek ETL SEMKO

CERTIFICATE OF COMPLIANCE

Applicant: United MS Electrical Mfg (M) Sdn Bhd
Lot 5, Batu 17 1/2, Jalan Ipoh
Rawang Industrial Estate
48000 Rawang Selangor Darul Ehsan, Malaysia

Product: (A) Double Pole Switches 25A (Flush Mounted)

Model(s): (A) N52120 (B) N52121 (C) N52122 (D) N52123 (E) N52124 (F) N52125 (G) N52126 (H) N52127 (I) N52128 (J) N52129 (K) N52130 (L) N52131 (M) N52132 (N) N52133 (O) N52134 (P) N52135 (Q) N52136 (R) N52137 (S) N52138 (T) N52139 (U) N52140 (V) N52141 (W) N52142 (X) N52143 (Y) N52144 (Z) N52145

Brand Name: neiken

The submitted sample(s) of the above product has been tested and complied with the following standard(s):

Standard(s): BS EN 60868-1: 2000 + Amd 1:2006

Test Report: ET-00403128

Date: 19 June 2004

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

EC SYSTEM FOR CONFORMITY TESTING TO STANDARDS FOR SAFETY OF ELECTRICAL EQUIPMENT (ETEC) SCHEME

Report No.: 95-1735

Product: PSB Corporation P10 L10

Applicant: United MS Electrical Mfg (M) Sdn Bhd

Inspector: United MS Electrical Mfg (M) Sdn Bhd

Factory: United MS Electrical Mfg (M) Sdn Bhd

Rating and principal characteristics: 10A 250V

Test report reference: NIKEL NIKEL NIKEL NIKEL NIKEL

Additional information: NIKEL NIKEL NIKEL NIKEL NIKEL

Signature of person authorized to sign in conformity with EEC: NIKEL NIKEL NIKEL NIKEL NIKEL

Test Report Ref No.: S55041596/8/MLM/PS

Date of issue: 2003-01-20

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu

Signature: K. P. Siu





Plate Switches 10A Single Pole

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N21100 1 Gang Bell Push

Qty/Ctn : 200pcs



N21110 - 1 Gang 1 way

Qty/Ctn : 200pcs


N21120 - 1 Gang 2 way



N21210 - 2 Gang 1 way

Qty/Ctn : 200pcs


N21220 - 2 Gang 2 way



N21310 - 3 Gang 1 way

Qty/Ctn : 200pcs


N21320 - 3 Gang 2 way



N21410 - 4 Gang 1 way

Qty/Ctn : 200pcs

N21420 - 4 Gang 2 way



N21510 - 5 Gang 1 way

Qty/Ctn : 200pcs

N21520 - 5 Gang 2 way



N21810 - 8 Gang 1 way

Qty/Ctn : 100pcs

N21820 - 8 Gang 2 way

Intermediate Switch 10A

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N25130 - 1 Gang

Qty/Ctn : 200pcs

Control Switches 20A Double Pole

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N22120
20A DP Switch

Qty/Ctn : 200pcs



N22121 - 20A DP Switch (NEON)
without earthing

Qty/Ctn : 200pcs

N22122 - 20A DP Switch (NEON)
with earthing

Qty/Ctn : 200pcs

Control Switches 45A Double Pole

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)


Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N24140
45A DP Switch 86 x 86 (mm)

Qty/Ctn : 200pcs




N24141
45A DP Switch 86 x 86 (mm)
(NEON)

Qty/Ctn : 200pcs



N24240
45A DP Switch 86 x 146 (mm)

Qty/Ctn : 100pcs



N24241
45A DP Switch 86 x 146 (mm)
(NEON)

Qty/Ctn : 100pcs



Key / Card Switch (For Hotel)


Standard : BS EN60669 , IEC60669

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N27100

with LED indicator

Qty/Ctn : 50pcs

Fused Connection Units 13A

Standard : BS1365⁴

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N43100

13A Fused


Qty/Ctn : 200pcs



N43101

13A Fused (NEON)


Qty/Ctn : 200pcs



N44110

13A Fused DP Switched

Qty/Ctn : 200pcs



N44111

13A Fused DP Switched (NEON)

Qty/Ctn : 200pcs

Dimmer Switches

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N26111

1 Gang 300W+ Switch

Qty/Ctn : 100pcs



N26211

2 Gang 300W+ Switch

Qty/Ctn : 100pcs



N26121

1 Gang 500W+ Switch

Qty/Ctn : 100pcs



N26221

2 Gang 500W+ Switch

Qty/Ctn : 100pcs



N26411

4 Gang 300W+ Switch

Qty/Ctn : 30pcs

Fan Control Switches

Standard : IEC60335-2-80, BS EN60669-2-1, SS227-2-1, IEC60669 -2-1, MS616

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N26230

Fan Control Switch (Max 500W)


Qty/Ctn : 100pcs



N26250

5 speed Fan Controller (Max 500W)

Qty/Ctn : 100pcs

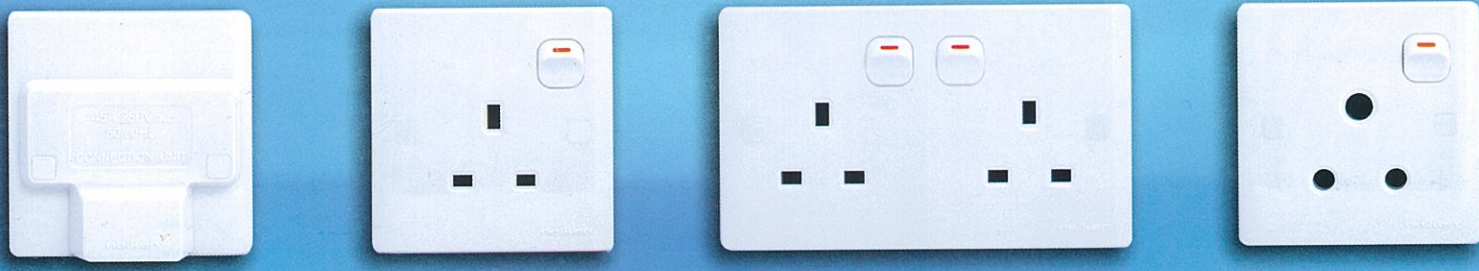

Connection Units


Standard : BS5733

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N45120

20A Connection Unit
with Flex Outlet


Qty/Ctn : 50pcs



N46130

32A Connection Unit
with Flex Outlet

Qty/Ctn : 50pcs



N47140

45A Connection Unit
with Flex Outlet

Qty/Ctn : 50pcs

5A Switched Socket Outlets


Standard : BS546

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)


Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N51110

5A SP Switched Socket Outlet

Qty/Ctn : 200pcs



N51111

5A SP Switched Socket Outlet
(NEON)

Qty/Ctn : 200pcs

13A Switched Socket Outlets

Standard : BS1363², SS145², MS589²


Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)


Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes




N52110 13A 1 Gang SP Switched

Qty/Ctn : 200pcs




N52111 13A 1 Gang SP Switched
(NEON)

Qty/Ctn : 200pcs



N52210 13A 2 Gang SP Switched

Qty/Ctn : 100pcs



N52211 13A 2 Gang SP Switched
(NEON)

Qty/Ctn : 100pcs

15A Socket Outlets


Standard : BS546, SS472,

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)


Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N53100

15A Unswitched Socket Outlet


Qty/Ctn : 200pcs



N53110

15A SP Switched Socket Outlet




Qty/Ctn : 200pcs



N53111

15A SP Switched Socket Outlet (NEON)

Qty/Ctn : 200pcs

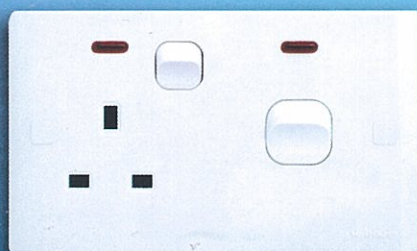

2A Unswitched Socket Outlet


Standard : BS546

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N50110

2A Unswitched Socket Outlet

Qty/Ctn : 200pcs

Cooker Control Unit 45A


Standard : BS EN60669-1, SS227

Colour : Milky White

Material : Polycarbonate

Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N42201

45A DP Switch (NEON) and
13A Switched Socket Outlet (NEON)

Qty/Ctn : 30pcs

Shaver Supply Unit

Standard : IEC60742

Colour : Milky White

Material : Polycarbonate

Dimension : 2G Plate 86.0 x 146.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N58100

Outputs : 115 / 240V a.c

Qty/Ctn : 30pcs

Telephone,TV,FM & LAN Data Sockets

Colour : Milky White

Material : Polycarbonate


Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N54140 1 Gang TEL

Qty/Ctn : 200pcs



N54240 2 Gang TEL

Qty/Ctn : 200pcs




N54220 TEL and TV

Qty/Ctn : 200pcs



N54180 1 Gang LAN

Qty/Ctn : 200pcs




N54280 2Gang LAN

Qty/Ctn : 200pcs




N54184 TEL and LAN

Qty/Ctn : 200pcs




N57100 1 Gang TV

Qty/Ctn : 200pcs



N57200 TV / FM

Qty/Ctn : 200pcs



N57110 1 Gang F-Type Satellite

Qty/Ctn : 200pcs




N57210 TV + F-Type Satellite

Qty/Ctn : 200pcs



N54150 1 Gang UK TEL Socket

Qty/Ctn : 200pcs



16A 2Pin Universal Socket Outlets


Standard : IEC60884

Colour : Milky White

Material : Polycarbonate


Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes




N56110
1 Gang Unswitched

Qty/Ctn : 200pcs



N56210
2 Gang Unswitched

Qty/Ctn : 200pcs



N56310
3 Gang Unswitched

Qty/Ctn : 200pcs



N56120
1 Gang + 10A x 1 Way Switch

Qty/Ctn : 200pcs

16A Schuko Socket Outlet (Unswitched)


Standard : IEC60884-1

Colour : Milky White

Material : Polycarbonate

Dimension : 1G Plate 86.0 x 86.0 x 7.0(mm)

Supplied with 2 nos of screws M3.5 and screw caps for BS boxes



N56130
1 Gang 2P + E Unswitched

Qty/Ctn : 200pcs

METAL CLAD SERIES

Metal Clad Switches 10A Single Pole

Metal Clad switches 10A

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Silver Grey

Material : Polycarbonate

Dimension : 1G Plate 81.5 x 81.5 x 7.0(mm)


Dimension : 2G Plate 81.5 x 142.0 x 7.0(mm)

Fitted with mounting boxes



N31100
1 Gang Bell Push

Qty/Ctn : 50pcs



N31110 - 1 Gang 1 way
N31120 - 1 Gang 2 way

Qty/Ctn : 50pcs



N31210 - 2 Gang 1 way
N31220 - 2 Gang 2 way

Qty/Ctn : 50pcs



N31310 - 3 Gang 1 way
N31320 - 3 Gang 2 way

Qty/Ctn : 50pcs




N31410 - 4 Gang 1 way
N31420 - 4 Gang 2 way

Qty/Ctn : 50pcs



N31610 - 6 Gang 1 way
N31620 - 6 Gang 2 way

Qty/Ctn : 30pcs



N31810 - 8 Gang 1 way
N31820 - 8 Gang 2 way

Qty/Ctn : 30pcs



Metal Clad Control Switches 20A Double Pole

Standard : BS EN60669, IEC60669, SS227, MS616

Colour : Silver Grey

Material : Polycarbonate, Mild steel

Dimension : 1G Plate 81.5 x 81.5 x 7.0(mm)

Fitted with mounting boxes



N32120
20A DP Switch

Qty/Ctn : 50pcs



N32121
20A DP Switch (NEON)

Qty/Ctn : 50pcs

Metal Clad 13A Switched Socket Outlets

Standard : BS1363², SS145², MS589²

Colour : Silver Grey

Material : Polycarbonate

Dimension : 1G Plate 81.5 x 81.5 x 7.0(mm)


Dimension : 2G Plate 81.5 x 142.0 x 7.0(mm)

Fitted with mounting boxes



N62110 13A 1 Gang SP Switched
N62111 13A 1 Gang SP Switched (NEON)

Qty/Ctn : 50pcs



N62210 13A 2 Gang SP Switched
N62211 13A 2 Gang SP Switched (NEON)

Qty/Ctn : 30pcs

Metal Clad 15A Switched Socket Outlets


Standard : BS546, SS472, MS1577

Colour : Silver Grey

Material : Polycarbonate

Dimension : 1G Plate 81.5 x 81.5 x 7.0(mm)

Fitted with mounting boxes



N63110 15A 1 Gang SP Switched
N63111 15A 1 Gang SP Switched (NEON)

Qty/Ctn : 50pcs

2.5A 2Pin Portable Switched Socket Outlets

Standard : SS488, MS1579

Colour : Milky White / Grey

Material : Polycarbonate / Polypropylene

Maximum : 10A, 250V~

Supplied with 1.25Sq mm x 2 core flexible cord and 13A fused plug



N85420
2.5A 2Pin 4 Gang
Socket Outlet
Qty/Ctn : 20pcs

W/O cord or plug
N85423

Qty/Ctn : 40pcs



N85430
2.5A 2Pin 4 Gang
Socket Outlet
with Shutter
Qty/Ctn : 20pcs

N85433

Qty/Ctn : 40pcs


13A Portable Switched Socket Outlets

Standard : BS1363², SS145², MS589²

Colour : Milky White


Material : Polycarbonate

Supplied with 1.25Sq mm x 3 core flexible cord and 13A fused plug




N81210
N81211 Neon
N82210 with Surge Protector
N82211 with Surge Protector (NEON)
Qty/Ctn : 20pcs

W/O cord or plug
N81220
N81221
N82220
N82221
Qty/Ctn : 40pcs



N81310
N81311 Neon
N82310 with Surge Protector
N82311 with Surge Protector (NEON)
Qty/Ctn : 20pcs

W/O cord or plug
N81320
N81321
N82320
N82321
Qty/Ctn : 40pcs





N81410
N81411 Neon
N82410 with Surge Protector
N82411 with Surge Protector (NEON)
Qty/Ctn : 20pcs

W/O cord or plug
N81420
N81421
N82420
N82421
Qty/Ctn : 40pcs



N81510
N81511 Neon
N82510 with Surge Protector
N82511 with Surge Protector (NEON)
Qty/Ctn : 20pcs

W/O cord or plug
N81520
N81521
N82520
N82521
Qty/Ctn : 40pcs

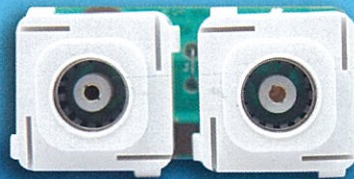

N83410 TV Outlet with Surge Protector

N83411 TV Outlet with Surge Protector (NEON)


Qty/Ctn : 20pcs

W/O cord or plug

N83420

N83421

Qty/Ctn : 40pcs



N84410 TEL Outlet with Surge Protector

N84411 TEL Outlet with Surge Protector (NEON)

Qty/Ctn : 20pcs

W/O cord or plug

N84420

N84421

Qty/Ctn : 40pcs


16A Portable Schuko Socket Outlets

Standard : IEC60884-1

Colour : Grey

Material : Polypropylene

Supplied with flexible cord and right angled schuko plug



N85440 16A 2Pin 4 Gang Portable


+ Earth Socket Outlet

Qty/Ctn : 20pcs

W/O cord or plug

N85443

Qty/Ctn : 40pcs



N85640 16A 2Pin 6 Gang Portable

+ Earth Socket Outlet

Qty/Ctn : 20pcs

N85643

Qty/Ctn : 40pcs

Switch Disconnectors

Standard : BS EN60947-3, IEC60947-3

Colour : Grey

Material : Polycarbonate


Dimensions: 84.0 x 170.0 x 86.0(mm)

Utilisation Category : AC-23A

Rated Frequency : 50/60Hz

Supplied with 2 reducer glands and 4 mounting screw caps

Qty/Ctn : 20pcs

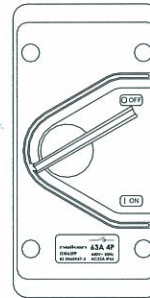

N41220 - 2 pole 20A Isolator, IP66

N41232 - 2 pole 32A Isolator, IP66

N41240 - 2 pole 40A Isolator, IP66

N41263 - 2 pole 63A Isolator, IP66

N41320 - 3 pole 20A Isolator, IP66

N41332 - 3 pole 32A Isolator, IP66

N41340 - 3 pole 40A Isolator, IP66

N41420 - 4 pole 20A Isolator, IP66

N41432 - 4 pole 32A Isolator, IP66

N41440 - 4 pole 40A Isolator, IP66

N41463 - 4 pole 63A Isolator, IP66

Features:

Built to withstand extreme industrial environments. Dust and water proof (IP66 rating), featuring gasket seals and made from high impact resistant and flame retarding materials.

Certified to provide uninterrupted duty. Sturdy rotary operation ON/OFF lever. Pad-lockable in the OFF position (using padlock with 6 mm dia. shank) for safety purposes.






Supplied with 2 nos. 25mm to 20mm (M25-M20) reducer glands for expanded connectivity and 4 nos. mounting screw caps.

Specifications \ Model No.		N41220	N41232	N41240	N41263	N41320	N41332	N41340	N41420	N41432	N41440	N41463
Isolator Description		2-pole	2-pole	2-pole	2-pole	3-pole	3-pole	3-pole	4-pole	4-pole	4-pole	4-pole
Rated Operational Current		20 A	32 A	40 A	63 A	20 A	32 A	40 A	20 A	32 A	40 A	63 A
Rated Operational Voltage		250 V	250 V	250 V	250 V	440 V	440 V	440 V	440 V	440 V	440 V	440 V
Rated Insulation Voltage		250 V	250 V	250 V	250 V	440 V	440 V	440 V	440 V	440 V	440 V	440 V
Rated Impulse Withstand Voltage		2500 V	2500 V	2500 V	2500 V	2500 V	2500 V	2500 V	2500 V	2500 V	2500 V	2500 V
Rated Short-Time Withstand Current For 1 sec.		240 A	384 A	480 A	756 A	240 A	384 A	480 A	240 A	384 A	480 A	756 A
Rated Short-Circuit Making & Breaking Capacities For 50 ms.		240 A	384 A	480 A	756 A	240 A	384 A	480 A	240 A	384 A	480 A	756 A
Live Terminal Screw Size		M5	M6	M6	M6	M5	M6	M6	M5	M6	M6	M6
Neutral Terminal Screw Size		M5	M5	M5	M5	M5	M5	M5	M5	M6	M6	M6
Earth Terminal Screw Size		M5	M5	M5	M5	M5	M5	M5	M5	M5	M5	M5
Live Terminal Screws Torque		2 NM	2.5 NM	2.5 NM	2.5 NM	2 NM	2.5 NM	2.5 NM	2 NM	2.5 NM	2.5 NM	2.5 NM
Neutral Terminal Screws Torque		2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2.5 NM	2.5 NM	2.5 NM
Earth Terminal Screws Torque		2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM	2 NM
Rigid/Stranded Conductor Size	Min.	2.5 mm ²	6 mm ²	6 mm ²	6 mm ²	2.5 mm ²	6 mm ²	6 mm ²	2.5 mm ²	6 mm ²	6 mm ²	10 mm ²
	Max.	4 mm ²	10 mm ²	10 mm ²	10 mm ²	4 mm ²	10 mm ²	10 mm ²	4 mm ²	10 mm ²	10 mm ²	16 mm ²






ACCESSORIES




Module Units

-  N2101 10AX Switch Module 1 Way
-  N2102 10AX Switch Module 2 Way
-  N2201 Neon Indicator
-  N2202 20A Double Pole Switch Module
-  N2601 Dimmer 300W
-  N2602 Dimmer 500W
-  N2603 500W Fan Control Switch
-  N5401 RJ11 Telephone 6p4c Module
-  N5402 RJ45 LAN Module
-  N5701 TV Socket Module
-  N5702 TV FM Module
-  N5703 F-Type Satellite TV Module

Cover Plates

-  N49100 1 Gang Blank Plate
-  N49200 2 Gang Blank Plate
-  N211 Plate For 1 Unit
-  N212 Plate For 2 Units
-  N213 Plate For 3 Units
-  N214 Plate For 4 Units
-  N215 Plate For 5 Units
-  N218 Plate For 8 Units

Pattress Boxes

-  N48100
1 Gang (86 x 86 x 25mm) Plastic
-  N48200
2 Gang (146 x 86 x 25mm) Plastic
-  N48300
1 Gang (81.5 x 81.5 x 40mm) Metal
-  N48400
2 Gang (142 x 81.5 x 40mm) Metal